

Version	Evo - Wall - 35 cm - Inox - 800 m3/h
Design	Falmec Lab
Collection	Design
TECHNICAL FEATURES	
Materials/Finishes	Scotch brite stainless steel (AISI 304)
Control	Electronic control
Function	Extracting/Filtering
Lighting	Dimmable lighting
	Dynamic Light (2700K - 5600K)
	LED 3x1,2 W - 2700 K / 5600 K
Filters	Metallic grease filter, removable and washable
	Charcoal filter (optional)
Dimensions	35 cm
Minimum Electric hob distance	52 cm
Minimum Gas hob distance	60 cm

CONNECTION AND CONSUMPTION FUNCTIONS

Maximum consumption	280 W
Voltage/Frequency	220-240V 50-60Hz
Plug	Shuko

MOTOR


Motor	800 m³/h
Maximum capacity	765 m³/h I.E.C.61591
Maximum sound level	65 dB (A)re1pW I.E.C. 60704-2-13
Energy class	A

WEIGHTS AND VOLUMES

Gross weight	21 kg
Net weight	16.4 kg
Volume	0.3 m3
Packaging dimensions	L 995 x H 502 x P 595 mm




Photograph is for information purposes only. May not correspond to the selected version



Optional accessories

Code	Description
103050091	Round charcoal filter Ø170 mm - Type 6

FLOW RATE / PRESSURE

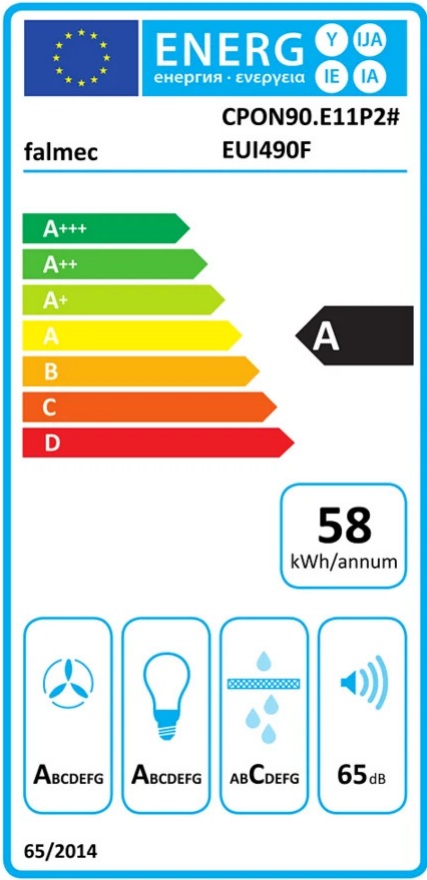

PF			
S	Falmec Lab		
M	Evo - Wall - 35 cm - Inox - 800 m3/h		
AEC	A	m³ /h	
EEC			
FDE			
FDEC			
LE			
LEC			
GFE			
GFEC			
Qmin			
Qboost			
SPEmin			765
SPEmax			48
SPEboost	65		
PO			
PS			
PI			
Qboost	765	m³ /h	
WL	6	W	
Emiddle	179	lux	
Lwa-SPEmax	65	dBa	

PF_Scheda prodotto conforme a 65/2014 S_Vendor name / M_Project identification / AEC_Yearly energy consumption (AEC) hood / EEC_Energy efficiency class / FDE_Fluid dynamic efficiency (FDE) hood / FDEC_Fluid dynamic efficiency class / LE_Light efficiency (LE) hood / LEC_Light efficiency class of luminous efficiency / GFE_Fat filtration efficiency / GFEC_Fat filtration efficiency class / Qmin_Airflow (in m³/h) at minimum power under normal use conditions / Qmax_Airflow (in m³/h) at maximum power under normal use conditions / Qboost_Airflow (in m³/h) at the intensive power / SPEmin_A-weighted sound power of airborne noise emissions at the minimum power under normal use conditions / SPEmax_A-weighted sound power of airborne noise emissions at the maximum power under normal use conditions / SPeboost_A-weighted sound power of airborne noise emissions under intensive or boost use conditions / P0_CPower consumption in off mode (Po) / Ps_CPower consumption in standby mode (Ps).

PI_Additional information in accordance with 66/2014 4 F_Factor of increase over time / EEL_Energy Efficiency Index / Qbep_Airflow speed measured at best efficiency point / Pbep_Air pressure measured at best efficiency point / Qboost_Full airflow / Wbep_Energy input measured at best efficiency point / WL_Nominal power of lighting system / Emiddle_Average illumination of lighting system on cooking surface / Lwa=SPEmax_Loise pressure level at maximum power