

Version	Wall - 80 cm - White - 800 m3/h
Design	Pio & Tito Toso
Collection	Design
TECHNICAL FEATURES	
Materials/Finishes	White opening frontal
Materials/Finishes	Chrome edge
Features	LED lighting on body and door Opening frontal
Control	Electronic control
Function	Extracting/Filtering
Chimney	Possible to duct wall mounted from rear Optional chimney
Lighting	LED 4x1,2 W - 3200 K
Filters	Top filter, removable and washable Charcoal filter
Dimensions	80 cm
Minimum Electric hob distance	52 cm
Minimum Gas hob distance	55 cm
Notes	RAL 9016 / Matt White The RAL codes have to be considered indicative since production process and materials may alter the colors.



Photograph is for information purposes only. May not correspond to the selected version

CONNECTION AND CONSUMPTION FUNCTIONS


Maximum consumption	280 W
Voltage/Frequency	220-240V 50-60Hz
Plug	Shuko

MOTOR

Motor	800 m³/h
Maximum capacity	750 m³/h I.E.C.61591
Maximum sound level	58 dB (A)re1pW I.E.C. 60704-2-13
Energy class	A

WEIGHTS AND VOLUMES

Gross weight	25 kg
Net weight	21 kg
Volume	0.28 m³
Packaging dimensions	L 995 x H 482 x P 595 mm

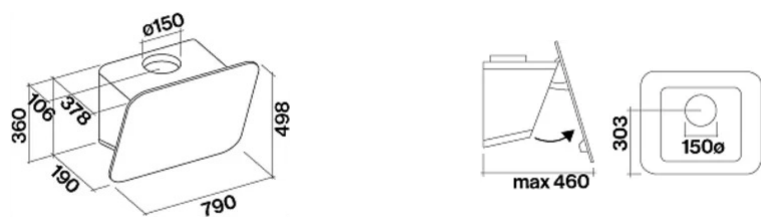


Optional accessories


Code	Description
KCTCN.001#B	Chimney - White
KACL.1059	Conveyer for air outlet ($\varnothing 150$)

ENGINE SPECIFICATIONS

Motor speed	1	2	3	4
Noise dB(A) re1pW I.E.C. 60704-2-13	46	53	58	66
Capacity	295	390	500	750
Maximum pressure (Pa)	390	440	490	510
Motor power (W)	130	150	178	224
Air outlet	150	150	150	150

FLOW RATE / PRESSURE

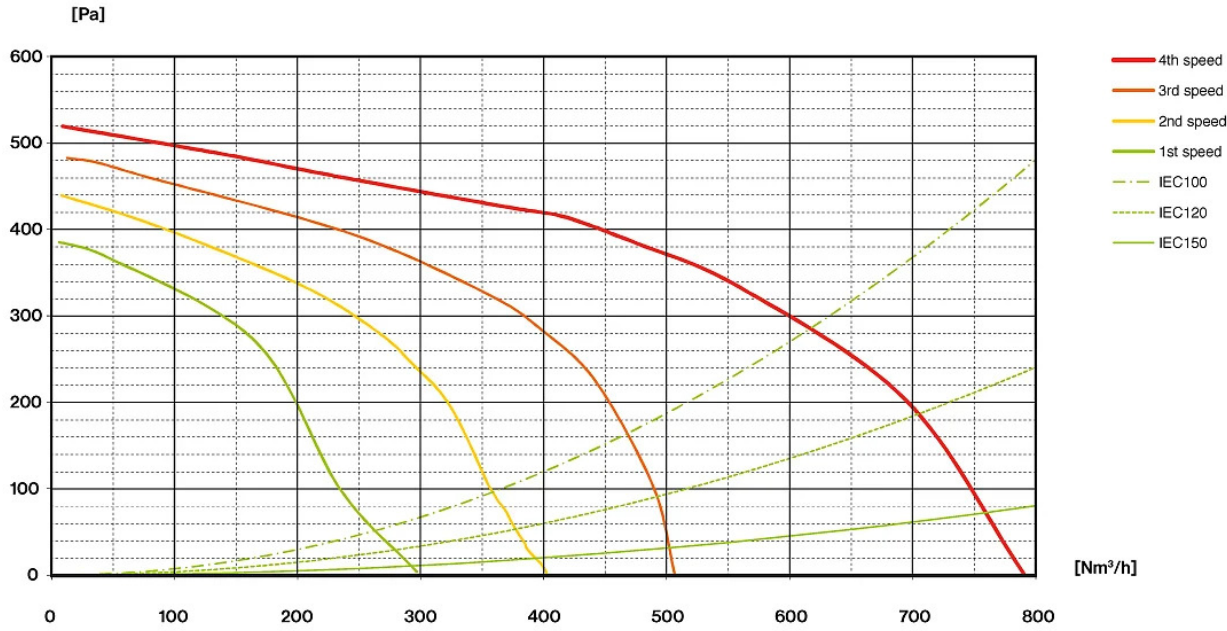

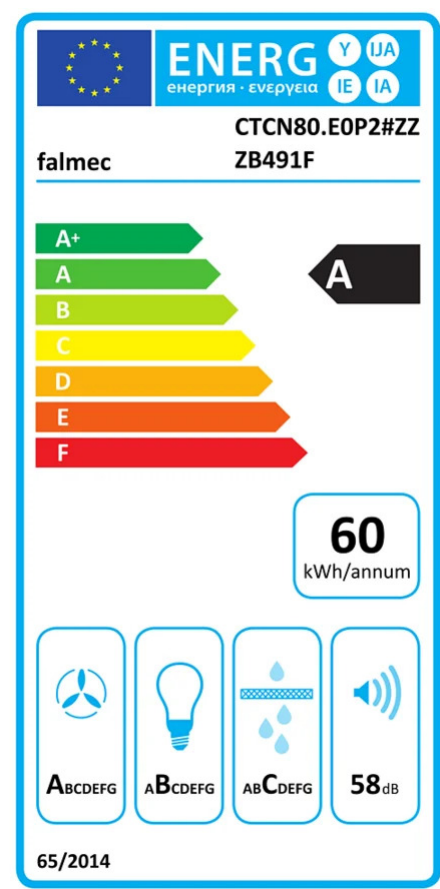

PF		
S	Pio & Tito Toso	
M	Wall - 80 cm - White - 800 m3/h	
AEC	60.2	kWh/a
EEC	A	
FDE	29.8	
FDEC	A	
LE	24.9	
LEC	B	
GFE	82	
GFEC	C	
Qmin	295	m³ /h
Qmax	500	m³ /h
Qboost	750	m³ /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	0	W
PS	0	W
PI		
F	0	
EEL	54	
Qbep	432	m³ /h
Pbep	407	Pa
Qboost	750	m³ /h
Wbep	164	W
WL	8.6	W
Emiddle	214	lux
Lwa-SPEmax	58	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.